


Polymak®

PM6028-HD MAGNETIC DRILL
Max Drilling Capacity: 28mm
Magnetic Adhesion: 13800N
No load speed: 300r/min
Fixture: MT3
Power: 2080W
Weight: 22KG

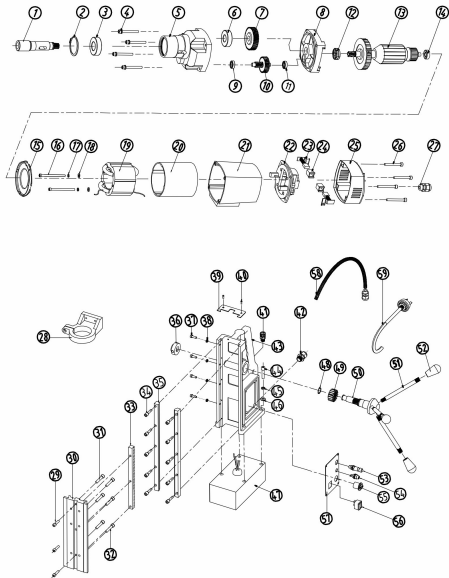

www.polymak.co.in

Polymak®

PM6028-HD SPARE PARTS LIST

No	Parts Name	Pcs	Seri No	INR	No	Parts Name	Pcs	Seri No	INR
1	MT-3 spindle				38	Screw Nut5			
2	Cirrip				39	Board			
3	60/28 RZ				40	Screw M3			
4	Screw M6				41	Connedor			
5	Gear Box				42	Connedor			
6	Bearing 6005				43	Rack part			
7	Flat Gear				44	Screw M6			
8	Middle Cover				45	Spring Pad			
9	RZ				46	Flat Pad			
10	Cluster Gear				47	Magnetic Base			
11	Bearing 608				48	Cirrip			
12	Bearing 6201				49	Lift Gear			
13	Armature				50	Lift Spindle			
14	Bearing 6000				51	Lifter Bar			
15	Air Deflector				52	Bakelite Ball			
16	Screw M5				53	Indicator Light			
17	Spring Pad				54	Fuse			
18	Flat Pad				55	Magnetic Switch			
19	Stator				56	Power Switch			
20	Field Coil Cover				57	Circuit Panel Assembly			
21	Field Coil Housing				58	Cord Sleeve			
22	Brush Holder				59	Cord			
23	Carbon Brush								
24	Brush Holder								
25	Motor Back Cover								
26	Screw M6								
27	Connedor								
28	Clamp Bracket								
29	Screw M6								
30	Lifting Guide Plate								
31	Screw M5								
32	Screw M6								
33	Rack								
34	Screw M5								
35	Iron Bar								
36	Back Cover of Lift Spindle								
37	Screw M5								