


Polymak®

PM30AC-0L OIL FREE AIR COMPRESSOR
Power: 2HP/1500W
Flow Rate: 100L/Min
No Load Speed: 2800r/min
Max Pressure: 8Bar/115PSI
Tank Capacity: 30L
Weight: 22Kg

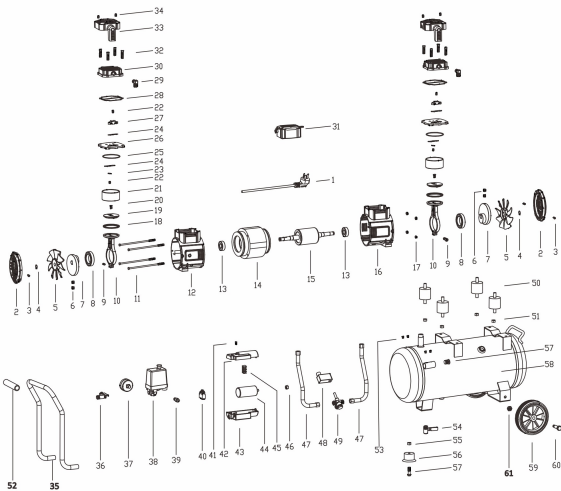

www.polymak.co.in

Polymak®

PM30AC-0L SPARE PARTS LIST

No	Parts Name	Pcs	Seri No	INR	No	Parts Name	Pcs	Seri No	INR
1	Socket Cable				38	Control Switch			
2	Motor Cover				39	Safety Valve			
3	Screw(S14*10 MM) Motor Cover				40	AC Circuit Breaker			
4	Clip,Cool Fan				41	Screw (S14*10 MM), Capacitance Box			
5	Cool Fan				42	Box Top, Capacitance			
6	Screw(M8*10), Crankshaft				43	Box Bottom, Capacitance			
7	Crankshaft				44	Capacitance			
8	Bearing,6006				45	Wiring Terminal			
9	Bolt(M6*16 MM),Rod				46	Nut, (M8 Flange)			
10	Rod				47	Pressured Pipe			
11	Bolt (M5*165 MM),Stator				48	Solenoid valves			
12	Crankcase,Left				49	Single Way Valve			
13	Bearing,6203				50	Rubber Sustain, Motor			
14	Stator				51	Nut(M8 Locked), Rubber Sustain, Motor			
15	Rotor				52	Grip			
16	Crankcase,Right				53	Screw,Handle			
17	Nut (M5 Flange),Stator				54	Drain Valve			
18	Sealing Cup				55	Nut (M8 Flange), Rubber Sustain, Tank			
19	Pressplate				56	Rubber Sustain, Tank			
20	Bolt(M6*14MM Hexagon),Pressplate				57	Bolt (M8*25 MM), Rubber Sustain, Tank			
21	Cylinder				58	Air Tank			
22	Bolt(M4*9 MM Stainless Steel), valve disc				59	Rubber Wheel ,6 Inch			
23	Intake Plate,Valve Disc				60	Bolt (Φ12*34*50 MM), Wheel			
24	Valve Disc				61	Nut(M10),Wheel			
25	Sealing,Valve Plate								
26	Valve Plate								
27	Limited Block								
28	Gasket, Cylinder Head								
29	Elbow								
30	Cylinder Head								
31	Muffler								
32	Bolt(M6*25 MM), Cylinder Head								
33	Cover,Cylinder Head								
34	Screw(M4*8 MM Black), Cylinder Head Cover								
35	Removeable Handle								
36	Ball Valve								
37	Pressured Guage,50								