


Polymak®

PM-MMA500-DY

current:	30-400A
input voltage:	300-415V
max input power:	18.8kw
max output current:	36A
power factor:	0.73
efficiency:	85%
duty cycle:	100%

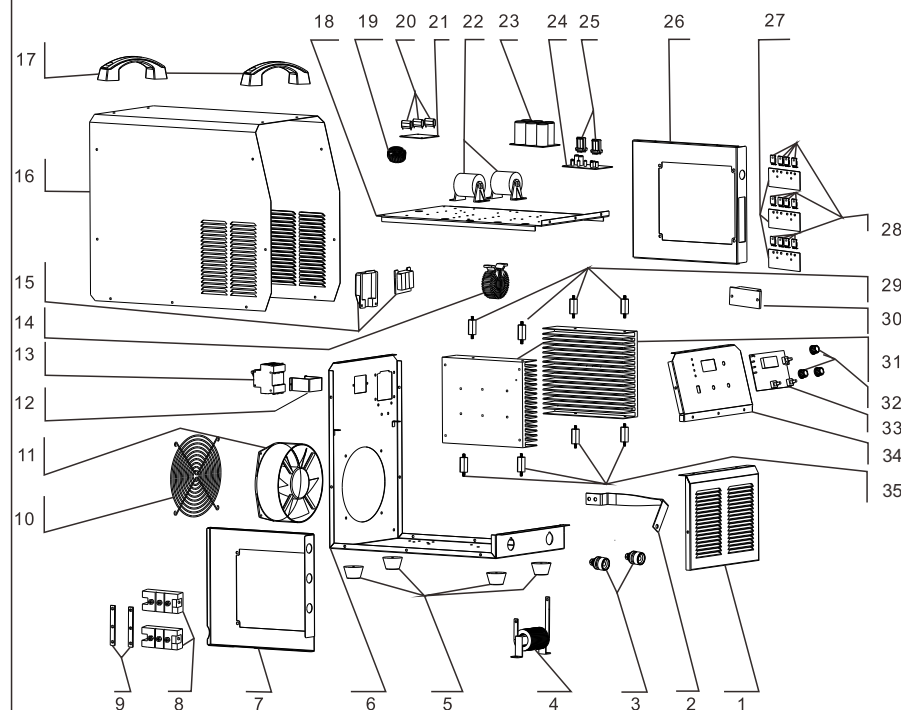

Polymak®

NO	Name	PCS	INR
1	Front panel	1	
2	Copper ribs	1	
3	Quick joint	2	
4	Reactance	1	
5	Foot pads	4	
6	Bottom shell	1	
7	Radiator bracket	1	
8	IGBT module	2	
9	Bronze medal	2	
10	Fan Net	1	
11	Fan	1	
12	Switch fixed bracket	1	
13	Air Switch	1	
14	Transformers	1	
15	Junction Box	2	
16	The shell	1	
17	Handle	2	
18	Middle Partition	1	
19	Inductors	1	
20	CBB capacitor	3	
21	CBB capacitor board	1	
22	Capacitors	2	
23	Capacitors board	1	
24	Circuit board	1	
25	Transformers	2	
26	Radiator bracket	1	
27	Circuit board	3	
28	Quick recovery	12	
29	Radiator struts	4	
30	Rectifier bridge	1	
31	Radiator	2	
32	Knob	3	
33	Digital display panel	1	
34	Front panel	1	
35	Radiator struts	4	